



FICHA TÉCNICA


Tornillo hexagonal rosca total negro
WHITWORTH-UNC

DIN 933

CLASE 8.8



Referencia: 0003 + Medida NEGRO

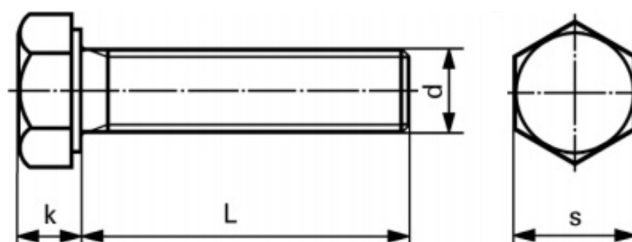

Thread, d	p	K				S		
		A		B		MAX	MIN	
		MAX	MIN	MAX	MIN		A	B
M1.6	0.35	1.22	0.98	/	/	3.2	3.02	/
M2	0.4	1.52	1.28	/	/	4	3.82	/
M2.5	0.45	1.82	1.58	/	/	5	4.82	/
M3	0.5	2.12	1.88	/	/	5.5	5.32	/
M3.5	0.6	2.52	2.28	/	/	6	5.82	/
M4	0.7	2.92	2.68	3	2.8	7	6.78	6.64
M5	0.8	3.65	3.35	3.74	3.26	8	7.78	7.64
M6	1	4.15	3.85	4.24	3.76	10	9.78	9.64
M7	1	4.95	4.65	5.04	4.56	11	10.73	10.57
M8	1.25	5.45	5.15	5.54	5.06	13	12.73	12.57
M10	1.5	6.56	6.22	6.69	6.11	17	16.73	16.57
M12	1.75	7.68	7.32	7.79	7.21	19	18.67	18.48
M14	2	8.98	8.62	9.09	8.51	22	21.67	21.16
M16	2	10.18	9.82	10.29	9.71	24	23.67	23.16
M18	2.5	11.72	11.28	11.85	11.15	27	26.67	26.15
M20	2.5	12.72	12.28	12.85	12.15	30	29.67	29.16
M22	2.5	14.22	13.78	14.35	13.65	32	31.61	31
M24	3	15.22	14.78	15.35	14.65	36	35.38	35
M27	3	/	/	17.35	16.65	41	/	40
M30	3.5	/	/	19.12	18.28	46	/	45
M33	3.5	/	/	21.42	20.58	50	/	49
M36	4	/	/	22.92	22.08	55	/	53.8
M39	4	/	/	25.42	24.58	60	/	58.8
M42	4.5	/	/	26.42	25.58	65	/	63.1
M45	4.5	/	/	28.42	27.58	70	/	68.1
M48	5	/	/	30.42	29.58	75	/	73.1
M52	5	/	/	33.5	32.5	80	/	78.1