


## FICHA TÉCNICA

Referencias: 09900014; 09900020; 09900030; 09900040; 09900050; 09900060; 09900630; 09900022; 09900025  
Brocas escalonadas HSS Normal

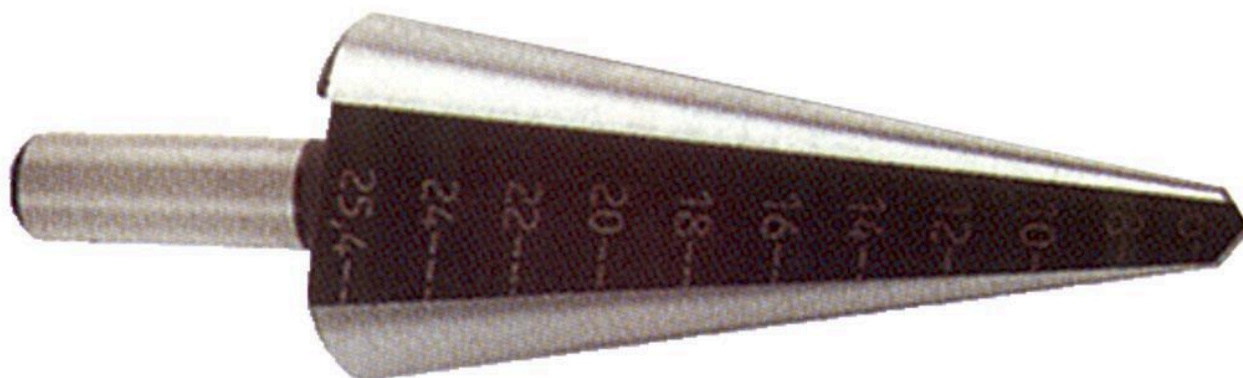

| Ref       | Ø           | ↔      |  |
|-----------|-------------|--------|---------------------------------------------------------------------------------------|
| 0990 0014 | 3 - 14 mm   | 62 mm  | 1                                                                                     |
| 0990 0020 | 6 - 20 mm   | 70 mm  | 1                                                                                     |
| 0990 0030 | 16 - 30 mm  | 78 mm  | 1                                                                                     |
| 0990 0040 | 26 - 40 mm  | 86 mm  | 1                                                                                     |
| 0990 0050 | 36 - 50 mm  | 90 mm  | 1                                                                                     |
| 0990 0060 | 46 - 60 mm  | 94 mm  | 1                                                                                     |
| 0990 0630 | 6 - 30 mm   | 106 mm | 1                                                                                     |
| 0990 0022 | 6 - 22,5 mm | 80 mm  | 1                                                                                     |
| 0990 0025 | 6 - 25,4 mm | 84 mm  | 1                                                                                     |

### BROCA AVELLANADA HSS.

Broca en acero rápido rectificadas con dos cortes planos.