



FICHA TÉCNICA

Referencias: 0788 0640; 0788 0650; 0788 0660; 0788 0670; 0788 0680; 0788 0850; 0788 0860; 0788 0870; 0788 0880; 0788 0890; 0788 08100; 0788 08110; 0788 08120; 0788 08130; 0788 1080; 0788 10100; 0788 10110; 0788 10120; 0788 10130; 0788 10140; 0788 10150; 0788 10180; 0788 10200

Espárragos Doble Rosca Cincados


Espárragos con doble rosca de acero con recubrimiento cincado y con huella Torx.

Son perfectos para la fijación, sujeción o ensamblado de dos superficies entre sí.

Los espárragos pueden utilizarse sobre superficies de piedra, madera, falso techo, hormigón, etc.

Disponibles con diferentes métricas para adaptarlo a su trabajo.

Longitud = L1

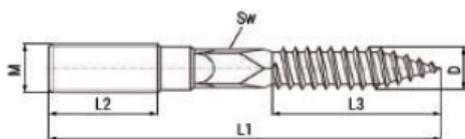

Ref	Ø M	L1	Ø D	L2	L3	HUELLA TORX	
0788 0640	M-6	38,5 ± 40,5 mm	5,75 ± 6,05 mm	11 ± 13 mm	23 ± 25 mm	T - 15	100
0788 0650	M-6	48,5 ± 50,5 mm	5,75 ± 6,05 mm	15 ± 17 mm	27 ± 30 mm	T - 15	100
0788 0660	M-6	58 ± 61 mm	5,75 ± 6,05 mm	17 ± 19 mm	33 ± 36 mm	T - 15	100
0788 0670	M-6	68 ± 71 mm	5,75 ± 6,05 mm	25 ± 27 mm	33 ± 36 mm	T - 15	100
0788 0680	M-6	78 ± 81 mm	5,75 ± 6,05 mm	33 ± 35 mm	33 ± 36 mm	T - 15	100
0788 0850	M-8	48,5 ± 51 mm	6,85 ± 7,15 mm	12 ± 14 mm	28 ± 31 mm	T - 25	100
0788 0860	M-8	58,5 ± 61 mm	6,85 ± 7,15 mm	14 ± 16 mm	36 ± 39 mm	T - 25	100
0788 0870	M-8	68,5 ± 71 mm	6,85 ± 7,15 mm	24 ± 26 mm	36 ± 39 mm	T - 25	100
0788 0880	M-8	78 ± 81 mm	6,85 ± 7,15 mm	27 ± 30 mm	36 ± 39 mm	T - 25	100
0788 0890	M-8	88 ± 91 mm	6,85 ± 7,15 mm	27 ± 30 mm	46 ± 49 mm	T - 25	100
0788 08100	M-8	98 ± 101 mm	6,85 ± 7,15 mm	32 ± 35 mm	46 ± 49 mm	T - 25	100
0788 08110	M-8	108 ± 111 mm	6,85 ± 7,15 mm	40 ± 45 mm	46 ± 49 mm	T - 25	100
0788 08120	M-8	118 ± 121 mm	6,85 ± 7,15 mm	48 ± 52 mm	46 ± 49 mm	T - 25	100
0788 08130	M-8	128 ± 131 mm	6,85 ± 7,15 mm	48 ± 52 mm	46 ± 49 mm	T - 25	100
0788 1080	M-10	78 ± 81 mm	8,75 ± 9,15 mm	16 ± 20 mm	45 ± 48 mm	T - 25	100
0788 10100	M-10	98 ± 101 mm	8,75 ± 9,15 mm	22 ± 26 mm	55 ± 59 mm	T - 25	100
0788 10110	M-10	108 ± 111 mm	8,75 ± 9,15 mm	36 ± 40 mm	55 ± 59 mm	T - 25	100
0788 10120	M-10	118 ± 121 mm	8,75 ± 9,15 mm	43 ± 47 mm	55 ± 59 mm	T - 25	100
0788 10130	M-10	128 ± 131 mm	8,75 ± 9,15 mm	48 ± 52 mm	55 ± 59 mm	T - 25	100
0788 10140	M-10	138 ± 141 mm	8,75 ± 9,15 mm	48 ± 52 mm	55 ± 59 mm	T - 25	100
0788 10150	M-10	148 ± 151 mm	8,75 ± 9,15 mm	48 ± 52 mm	55 ± 59 mm	T - 25	100
0788 10180	M-10	178 ± 181 mm	8,75 ± 9,15 mm	48 ± 52 mm	55 ± 59 mm	T - 25	50
0788 10200	M-10	198 ± 201 mm	8,75 ± 9,15 mm	48 ± 52 mm	55 ± 59 mm	T - 25	50