




## FICHA TÉCNICA

**Artículo:** 1060 0020, 0025, 0030, 0040, 0050, 0060, 0070, 0080, 0100, 0120  
**CADENA ACERO ZINCADO SOLDADA EN BOBINA**

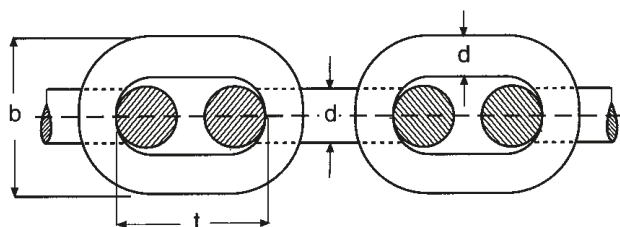

REF	Ø mm. (d.)	PASO t =	b =	CALIDAD NORMAL			PESO KG./MT.
				CARGA UTIL	CARGA DE PRUEBA	CARGA MINIMA DE ROTURA	
10600020	2	15	10	SIN GARANTIA			0,069
10600025	2,5	15	11,5	SIN GARANTIA			0,111
10600030	3	18	11	SIN GARANTIA			0,155
10600040	4	21	15	150	300	600	0,285
10600050	5	26	19	220	440	880	0,456
10600060	6	27,5	23	275	550	1.100	0,675
10600070	7	31	26	450	900	1.800	0,925
10600080	8	36	31	500	1.000	2.000	1,250
10600100	10	42	36	1.000	2.000	4.000	1,95
10600120	12	43	40	1.350	2.700	5.400	2,80

NOTA: En la cadena comercial, los datos referentes a carga útil, carga de prueba y de rotura son orientativos, sin garantía.